

Dispensing Valve DV-200 Needle Valve

Data Sheet

Features

Durable through using of diaphragm. Simple structure for application to various materials.

Applicable Material

Low~medium viscosity material such as solvent, silicone oil, epoxy, containing filler, etc.



Dimension

□23 x L99.5 mm (1.06 x 3.13 in)

Weight

170g

Driving Air Pressure

> 0.4 MPa (58.02 psi)

Material Feeding Pressure

Max. 0.6 MPa (87.02 psi)

Flux (KV Value)

1.7L/min

Driving Part Material


Aluminum

Wetted Part Material

SUS-303



Scan the QR Code to see how it works.

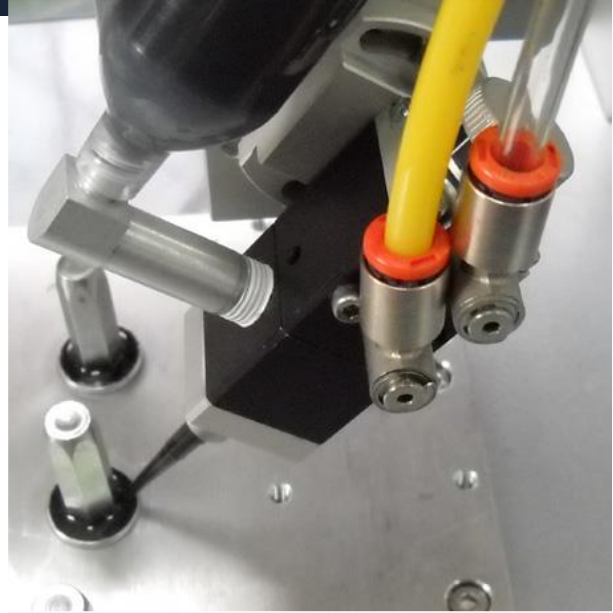

TAEHA's Pneumatic metering valves are widely used in various industries to provide reliable and accurate dispensing solutions. From low-viscosity materials to high-viscosity materials that are difficult to dispense, we have a lineup of valves that can dispense accurately and consistently.

Excellent product quality control by owning a dedicated facility that processes and produces valve precision parts.

Benefits:

- Fast open and close.
- Suitable with numerous materials.
- Can be used in automation with very low payload capacity.

