

Dispensing Valve DV-200H Needle Valve

Data Sheet

Features

Knob for easy regulating the flux. Good durability due to special seal structure.

Applicable Material

High viscosity of RTV silicone and grease, epoxy, etc.



Dimension

□25 x L135.7 mm (0.98 x 5.34 in)

Weight

240g

Driving Air Pressure

> 0.4 MPa (58.02 psi)

Material Feeding Pressure

Max. 12 MPa (1740.45 psi)

Flux (KV Value)

1.5L/min

Driving Part Material


Aluminum

Wetted Part Material

SUS-303



Scan the QR Code to see how it works.

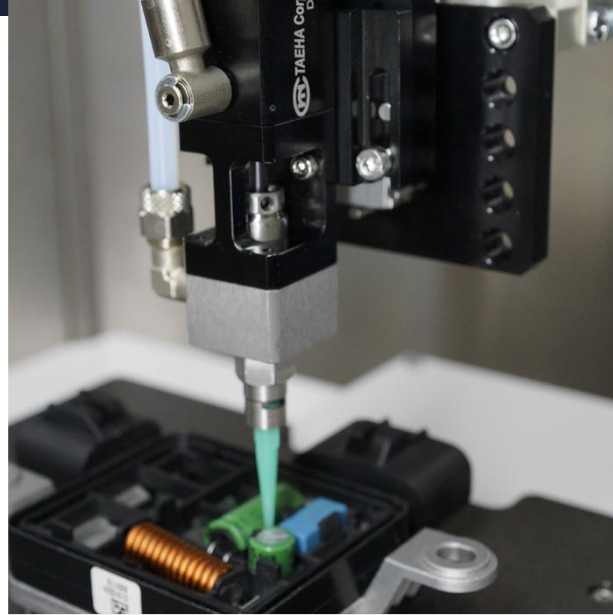

TAEHA's Pneumatic metering valves are widely used in various industries to provide reliable and accurate dispensing solutions. From low-viscosity materials to high-viscosity materials that are difficult to dispense, we have a lineup of valves that can dispense accurately and consistently.

Excellent product quality control by owning a dedicated facility that processes and produces valve precision parts.

Benefits:

- Fast open and close.
- Suitable with numerous materials.
- Can be used in automation with very low payload capacity.

