

## Dispensing Valve DV-30H Poppet Valve

Data Sheet

### Features

Small & horizontal type of DV-300. Good for installing to multi-head.

### Applicable Material

Low~ medium viscosity material.



### Dimension

23 x 65.4 x 51 mm (0.91 x 2.57 x 2.01 in)

### Weight

82g

### Driving Air Pressure

> 0.4 MPa (58.02 psi)

### Material Feeding Pressure

Max. 0.6 MPa (87.02 psi)

### Flux (KV Value)

1.2L/min

### Driving Part Material


Aluminum

### Wetted Part Material

SUS303



Scan the QR Code to see how it works.

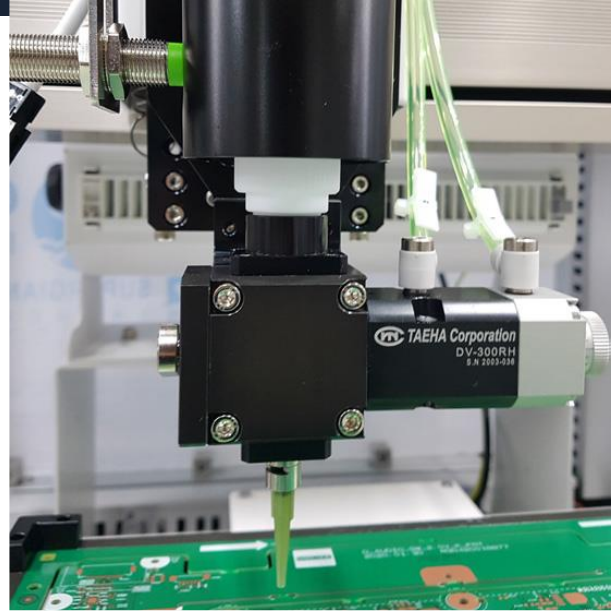

TAEHA's Pneumatic metering valves are widely used in various industries to provide reliable and accurate dispensing solutions. From low-viscosity materials to high-viscosity materials that are difficult to dispense, we have a lineup of valves that can dispense accurately and consistently.

Excellent product quality control by owning a dedicated facility that processes and produces valve precision parts.

### Benefits:

- Fast open and close.
- Suitable with numerous materials.
- Can be used in automation with very low payload capacity.

